

B-Max Broadband 800 nm Ultrafast Laser Mirrors for 45° Incidence


These high performance mirrors are intended to deliver maximum bandwidth for general purpose beam steering tasks in Ti:S ultrafast laser based applications.

Advantages


- Extremely wide spectral bandwidth
- High reflectivity
- Minimal group velocity dispersion
- Excellent damage resistance
- Excellent mechanical durability

Common Specifications

Chamfer	0.50 mm at 45°
Clear Aperture	85%
Diameter Tolerance	+0.00, -0.13 mm
Front Surface Flatness	$\lambda/10$ at 633 nm
Material	Fused Silica
Rear Surface	Commercial Polish
Surface Quality	10-5
Thickness Tolerance	± 0.25 mm
Wedge	<5 arc minutes
Surface 1 Flatness	$\lambda/10$ at 633 nm
Surface 1 Surface Quality	10-5
Surface 1 Coating	$\geq 99.5\%$ reflectivity at 800 nm
Surface 1 Angle Of Incidence	45°
Surface 2 Flatness	Commercial polish
Surface 2 Surface Quality	Commercial polish
Surface 2 Coating	None

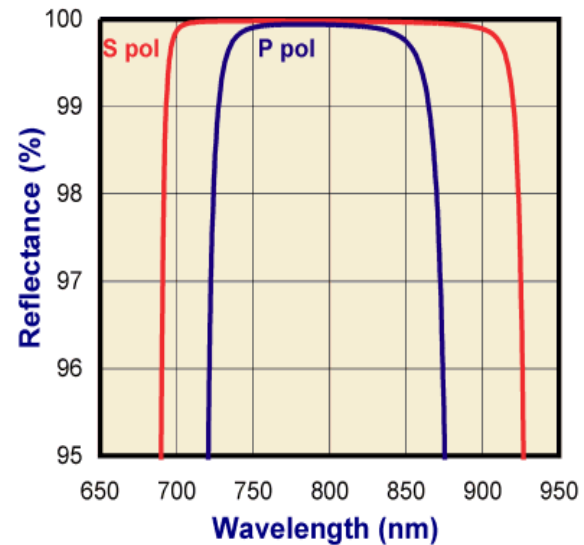

Part Number	Diameter	Thickness	Price
MR6040	25.4	9.525	\$225.00
MR6080	50.8	9.525	\$335.00

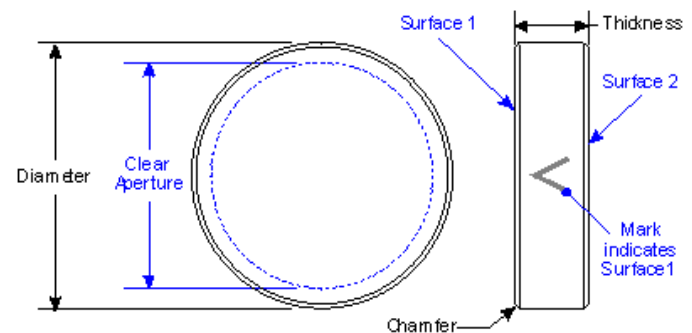

Alpine Research Optics, 6810 Winchester Circle, Boulder, Colorado 80301

sales@arocorp.com 303-444-3420

Copyright © 2006 Alpine Research Optics. All rights reserved.