

1064 nm Solid State Laser Mirrors for 45° Incidence


These high performance mirrors are intended for general purpose beam steering tasks in Nd:YAG and Nd:YVO4 laser based applications and systems.

Advantages


- High reflectivity
- Superior laser damage resistance
- Excellent mechanical durability

Common Specifications

Chamfer	0.50 mm at 45°
Clear Aperture	85%
Diameter Tolerance	+0.00, -0.13 mm
Front Surface Flatness	$\lambda/10$ at 633 nm
Material	Fused Silica
Rear Surface	Commercial Polish
Surface Quality	10-5
Thickness Tolerance	± 0.25 mm
Wedge	<5 arc minutes
Surface 1 Flatness	$\lambda/10$ at 633 nm
Surface 1 Surface Quality	10-5
Surface 1 Coating	$\geq 99.5\%$ reflectivity at 1064 nm
Surface 1 Damage Threshold	20 J/cm ² @ 3 ns
Surface 1 Angle Of Incidence	45°
Surface 2 Flatness	Commercial polish
Surface 2 Surface Quality	Commercial polish
Surface 2 Coating	None

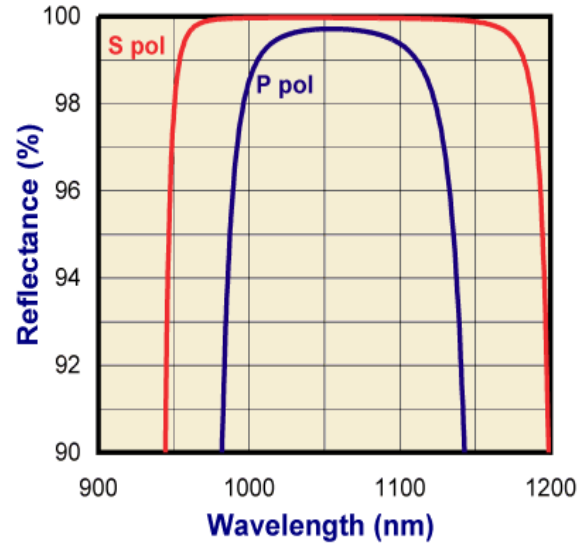

Part Number	Diameter	Thickness	Price
MR8040	25.4	9.525	\$215.00
MR8080	50.8	9.525	\$320.00

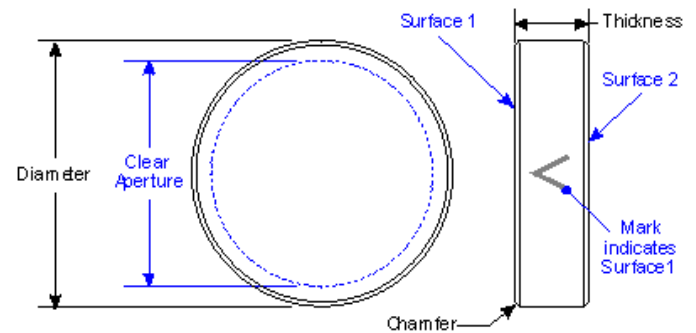

Alpine Research Optics, 6810 Winchester Circle, Boulder, Colorado 80301

sales@arocorp.com 303-444-3420

Copyright © 2006 Alpine Research Optics. All rights reserved.